



EUROPOWER®

www.EUROPOWERGenerators.com

YANMAR


DIESEL

Stroomaggregaten met **YANMAR** ééncilinder luchtgekoelde dieselmotor
 Groupes électrogènes avec moteur diesel **YANMAR** monocylindre refroidi par air
 Stromerzeuger mit **YANMAR** luftgekühltem 1-Zylinder Dieselmotor
 Generating sets with **YANMAR** single cylinder air-cooled diesel engine
 Grupos electrógenos con motor **YANMAR** diesel 1-cilindro refrigerado por aire

2,6 - 6 kVA

50 Hz - 3000/min

4-Takt / 4 temps / 4 stroke / 4 tiempos

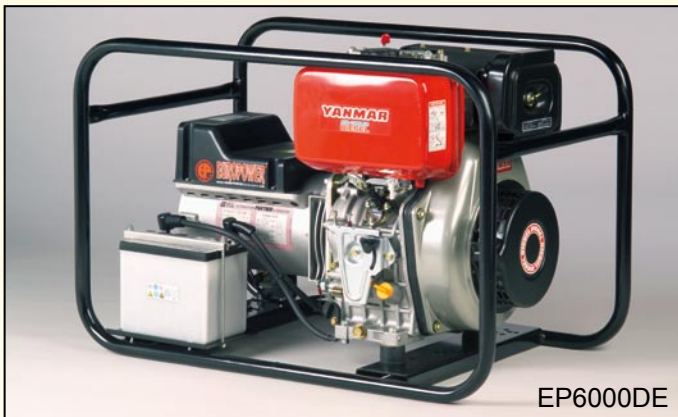

EP6000DE



EPG6000DE

TYPE TYP TIPO	kVA max.	kVA cont.	Amp.		Motor Moteur Engine YANMAR	PK CV PS HP	cm ³	Tank Réservoir Dépósito (l)	Autonomie Autonomy Autonomía (h at 75% load)	Uitvoering Version Ausführung Modelo	Afmetingen Dimens. Maße (cm)	kg	dB(A) @ 7m	LWA
			1 ~ 230 V	3 ~ 400 V										
EP2800D	2,6	2,3	10	-	L48N	4,2	219	2,4	3,4	A-F-R-Th	77x51x56	54	78	*
EP2800DE										A-E-F-OL-R-Th		68		
EP4000D	4	3,6	16	-	L70N	6,1	320	3,3	2,5	A-F-R-Th	77x51x56	70	80	*
EP4000DE										A-E-F-OL-R-Th		82		
EP6000D	5,5	4,9	22	-	L100N	8,8	435	5,4	3,0	A-F-R-Th	83x51x56	95	83	*
EP6000DE										A-E-F-OL-R-Th		110		
EPG6000DE	5	4,5	20	-	L100N	8,8	435	13	7,0	A-E-F-FG-MS-OP-Th	88x55x67	140	72	97
EP6000TD	6	5,5	18	6	L100N	8,8	435	5,4	3,0	B-F-R-Th	83x51x56	97	83	*
EP6000TDE										B-E-F-OL-R-Th		110		
EPG6000TDE	5,5	5	18	6	L100N	8,8	435	13	7,0	B-E-F-FG-MS-OP-Th	88x55x67	142	72	97

A = 2 stopcontacten 230V - 16A / 2 prises 230V - 16A / 2 Steckdosen 230V - 16A spritzwassergeschützt / 2 Sockets 230V - 16A / 2 tomas 230V - 16A

B = 1 stopcontact 230V - 16A + 1 stopcontact CEE 400V - 16A 5-polig / 1 prise 230V - 16A + 1 prise CEE 400V - 16A 5 pôles / 1 Steckdose 230V - 16A spritzwassergeschützt + 1 Steckdose CEE 400V - 16A spritzwassergeschützt 5-polig / 1 Socket 230V - 16A + 1 Socket CEE 400V - 16A 5-pole / 1 toma 230V - 16A + 1 toma CEE 400V - 16A 5-polos

E = Elektrisch gestart incl. accu / Démarrage électrique (batterie incluse) / Elektrostart mit Batterie / Electric Start (Battery included) / Arranque eléctrico (batería incluida)

F = Frame / Cadre / Gestell / Frame / Chasis

FG = Mechanische brandstofniveaumeter / Jauge mécanique carburant / Mechanische Kraftstoff-Uhr / Mechanical fuel level meter / Metro de nivel de combustible

MS = Magneto-Stop

OL = Oliedrukcontrolelamp / Lampe témoin pression d'huile / Öldruck-Kontrollampe / Low oil pressure control lamp / Lámpara de presión de aceite

OP = Oliedrukbeveiliging / Sécurité pression d'huile / Öldruck-Abschaltautomatik / Low oil pressure guard / Protección de nivel de aceite

R = Repeteerstarter / Lanceur à rappel / Reversierstarter / Recoil Starter / Arranque reversible

Th = Thermische beveiliging alternator / Protection thermique alternateur / Thermischer Schutzschalter / Circuit breaker / Disyuntor térmico alternador

* = Generators marked with an * cannot be used outdoors in the EU. For applications of generators indoors or if you want to integrate these generators in vehicles, please contact us.